


SPECIFICATIONS

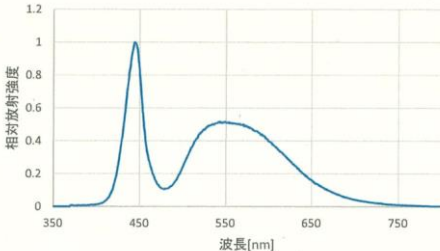

Model Name	LNLP－190SW－BTLACLHI																																																																														
Input Current	5.25A max.																																																																														
Power Consumption	211W max.																																																																														
LED Color	White																																																																														
Relative Spectral Power	Fig. 1																																																																														
Number of LEDs	55pieces																																																																														
Connector	37-prong connector,PRC04-21A26S-37M／ Manufacture: TAJIMI ELECTRICS CO., LTD.																																																																														
Polarity & Signal	Table. 1																																																																														
Operating Conditions	Temp. 0 ～ 30° C (Light intensity may vary due to the change in ambient temperature) Humidity 20 ～85% (non-condensing) (Should not be frozen, condensed or exposed to the rapid change in temperature)																																																																														
Storage Conditions	Temp. -20 ～ 60° C Humidity 20 ～ 85% (non-condensing)																																																																														
Exterior Dimensions	Refer to the drawing on a separate sheet																																																																														
Environmental Regulation	RoHS Directive Compliant Product (REACH Non-Compliant Product)																																																																														
Special Instruction	<div><div></div><div>Fig.</div></div> <div><table><tr><th></th><th>Pin No.</th><th>Connection</th><th></th><th>Pin No.</th><th>Connection</th></tr><tr><td>1</td><td>A</td><td>1(+)</td><td>13</td><td>N</td><td>4(+)</td></tr><tr><td>2</td><td>B</td><td>1(-)</td><td>14</td><td>O</td><td>4(-)</td></tr><tr><td>3</td><td>C</td><td>1(+)</td><td>15</td><td>P</td><td>4(+)</td></tr><tr><td>4</td><td>D</td><td>1(-)</td><td>16</td><td>R</td><td>4(-)</td></tr><tr><td>5</td><td>E</td><td>2(+)</td><td>17</td><td>S</td><td>5(+)</td></tr><tr><td>6</td><td>F</td><td>2(-)</td><td>18</td><td>T</td><td>5(-)</td></tr><tr><td>7</td><td>G</td><td>2(+)</td><td>19</td><td>U</td><td>5(+)</td></tr><tr><td>8</td><td>H</td><td>2(-)</td><td>20</td><td>V</td><td>5(-)</td></tr><tr><td>9</td><td>J</td><td>3(+)</td><td>21</td><td>g</td><td>FAN(+)</td></tr><tr><td>10</td><td>K</td><td>3(-)</td><td>22</td><td>i</td><td>FAN(-)</td></tr><tr><td>11</td><td>L</td><td>3(+)</td><td>23</td><td>k</td><td>FAN(RX)</td></tr><tr><td>12</td><td>M</td><td>3(-)</td><td>24</td><td>l</td><td>FAN(TX)</td></tr></table><div>Table. 1</div></div>		Pin No.	Connection		Pin No.	Connection	1	A	1(+)	13	N	4(+)	2	B	1(-)	14	O	4(-)	3	C	1(+)	15	P	4(+)	4	D	1(-)	16	R	4(-)	5	E	2(+)	17	S	5(+)	6	F	2(-)	18	T	5(-)	7	G	2(+)	19	U	5(+)	8	H	2(-)	20	V	5(-)	9	J	3(+)	21	g	FAN(+)	10	K	3(-)	22	i	FAN(-)	11	L	3(+)	23	k	FAN(RX)	12	M	3(-)	24	l	FAN(TX)
	Pin No.	Connection		Pin No.	Connection																																																																										
1	A	1(+)	13	N	4(+)																																																																										
2	B	1(-)	14	O	4(-)																																																																										
3	C	1(+)	15	P	4(+)																																																																										
4	D	1(-)	16	R	4(-)																																																																										
5	E	2(+)	17	S	5(+)																																																																										
6	F	2(-)	18	T	5(-)																																																																										
7	G	2(+)	19	U	5(+)																																																																										
8	H	2(-)	20	V	5(-)																																																																										
9	J	3(+)	21	g	FAN(+)																																																																										
10	K	3(-)	22	i	FAN(-)																																																																										
11	L	3(+)	23	k	FAN(RX)																																																																										
12	M	3(-)	24	l	FAN(TX)																																																																										